

NOL85-38 & NOL100-38

Oil Burner

1742kW - 2767kW



NOL85-38 / NOL100-38 Oil Burner features:

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- Designed for 2 stage (high/low) operation (Separate data sheet for modulation)
- Plug-in contact facilitates the installation
- Fuel - Light Oil (Class D) (1.5 – 5.5 cSt at 40°C)
- Optional Extras
 - Air inlet silencer
 - Water level control (AOTC) panel
- All kW ratings are nett CV




For more information on Mechmar products
please visit www.mechmar.com.sg

MECHMAR®

Type		NOL85-38	NOL100-38
Capacity	kW	1742 – 2327	2327 - 2767
Fan Motor	V/ph/Hz	380-420 / 3 / 50	380-420 / 3 / 50
	kW	5.5	7.5
Start current	A/each phase	40	60
Run current	A/each phase	11.5	14.4
Cable size	mm ²	2.5	4.0
Fuse	HRC (A)	20	25
Control box		LAL	LAL
Fuel pump		Suntec	Suntec
Fuel connection	inch BSP	0.5	0.75
Control options		2 Stage / Mod	2 Stage / Mod
Noise @ 1m	dBA	90	98
Gross weight	kg	118	126
Volume	m ³	0.95	1.28

• Standard

Other electrical options available on request.

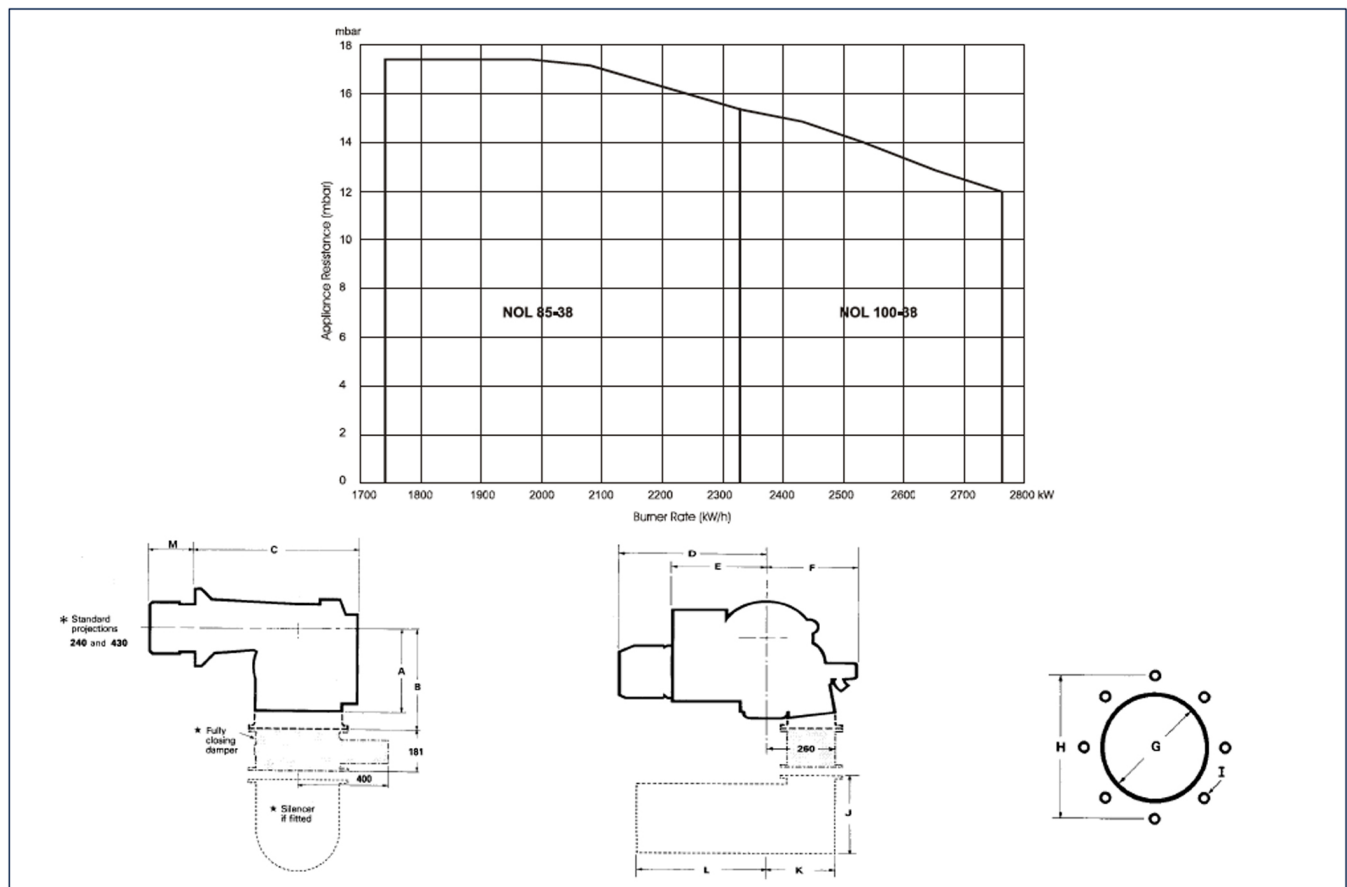

Burner	B	C	D	E	F	G	H	I	J	K	L	M*
NOL85-38	480	737	537	490	350	280	305	10	381	260	476	230/430
NOL100-38	480	737	437	490	365	280	305	10	381	260	476	230/430

* Other options available

MECHMAR (PTE) LTD

56 Kian Teck Road Singapore 628791

Tel: 6268 3048 Fax: 6261 4049

E-mail: mechmar@singnet.com.sg

Website: www.mechmar.com.sg

MECHMAR®