


Technical Specification

GN-1100

Steaming Hot Water Tap

Specification

The GN-1100 model comes complete with the following specifications.

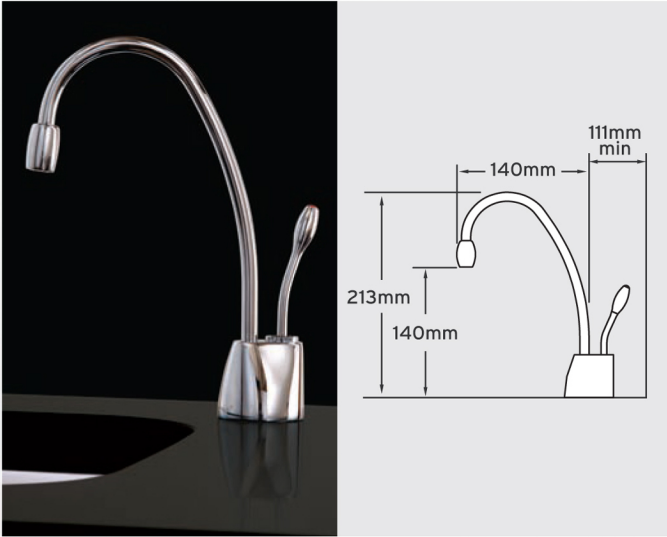

GN1100 - Chrome finish standard. Alternative finishes available by special order.

Capacity	2.5 Litre Stainless Steel tank dispenses 100 cups of 98°C water per hour
Electrical	220 - 240 volts A.C. 1300 watts heating element with grounded plug. Requires 6 amps of power. 115 - 120 volts A.C. 1300 watts heating element with grounded three (3) prong plug. Requires 11.5 amps of power.
Thermostat	Electronic, adjustable from 88°C to 98°C (factory pre-set at 96°C)
Insulation	Meets U.L. 94HF-1 flammability specification
Hot Valve	Instant, self closing
Weight	Approximately 4.4kg
Required Hole Diameter	35mm - 38mm
Required Supply Pressure	172 - 862 kPa (1.7 - 8.6 bar) (25 - 125 psi)

MECHMAR (PTE) LTD

56 KIAN TECK ROAD SINGAPORE 628791
TEL: 6268 3048 FAX: 6261 4049
E-Mail: mechmar@singnet.com.sg
Website: www.mechmar.com.sg

MECHMAR®

in sink erator®

Technical Specification

GN-1100

Steaming Hot Water Tap



GN-1100

Application

A premium sink appliance for the kitchen that conveniently dispenses instant 98°C water from a single tap. Ideal for making tea, preparing pasta, cleaning dishes, blanching vegetables, warming baby's bottle or for any other activity that requires the use of steaming hot water.

Features

- Sparkling chrome finish
- Elegant spout swivels for convenience
- Gentle touch, one lever dispenser
- Shut off valve built into filter head to automatically stop water flow
- Tap insulated from heat
- Tap mounted on either the kitchen work surface or sink
- Unobtrusive 2.5 litre stainless steel tank fitted under sink
- Easy replaceable filter
- Adjustable temperature dial
- Plugs directly into electrical socket located close to appliance
- Two year full in-home warranty

Benefits

- 98°C steaming hot water instantly
- Produces up to 100 cups of steaming hot water per hour
- Safe, filtered drinking water
- Reduces chlorine, lead, turbidity and other unpleasant tastes and odours from water
- Energy efficient and economical, saving both time and money once installed
- Special scale reduction technology to protect heating elements in hard water
- Time-tested quality
- Tool free tank connections and dry start protection to ease installation



GN-1100 Tap

Elegant swivel spout with gentle touch lever and sparkling chrome finish

Tank

Unobtrusive 2.5 litre stainless steel hot water tank fitted under the sink, with easy adjustable temperature dial with wall socket plug in



Filter

Water supply flows through the in-line filter and then into the tank for heating



Installation

InSinkEerator's Steaming Hot Water Tap is easy to install. Simply follow six step-by-step instructions to enjoy the convenience of instant steaming hot water in your kitchen.



1

Step One

- Install the tap



2

Step Two

- Mount the tank



3

Step Three

- Connect the tap to the tank



4

Step Four

- Connect the filtration system



5

Step Five

- Final water connection



6

Step Six

- Connect power